



Full Automatic Optical Fiber Taper GWCLZ-20




Specification	
Model name	GWCLZ-20
Applicable optical fiber material	Quartz optical fiber
Optical fiber cladding diameter	125-1600μm
Optical fiber coating diameter	250-2000μm
Optical fiber Z-axis movement	180mm
Fire head assembly life	300 minutes (Typical value)
Filament temperature range	Room temperature to 3000° C
Dimensions	435(H)*318(H)*260(H)mm
Weight	20kg
Power supply	AC220V 50Hz
Operating condition	Temperature: -10~+50°C, Humidity:< 95%RH (non dew)
Storage condition	Temperature: -5°C ~+35°C; Humidity:: 65±20%RH

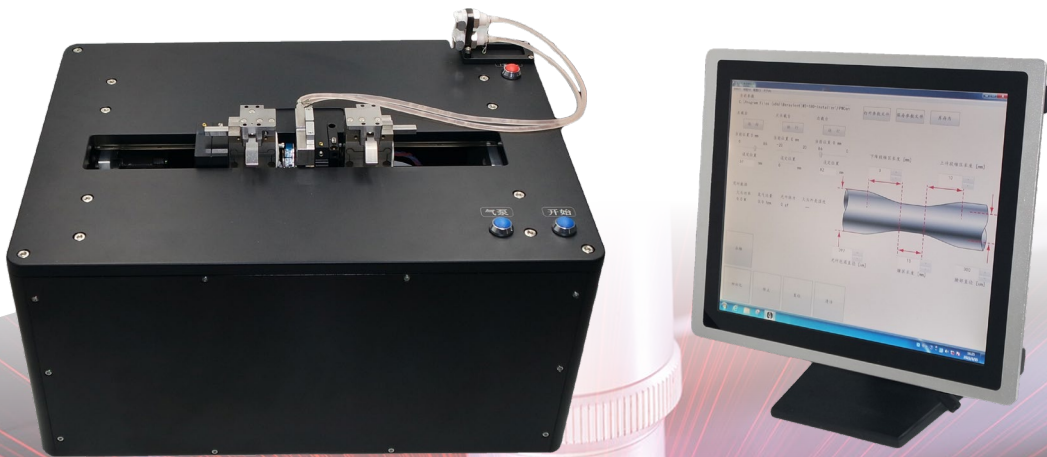


Effect display

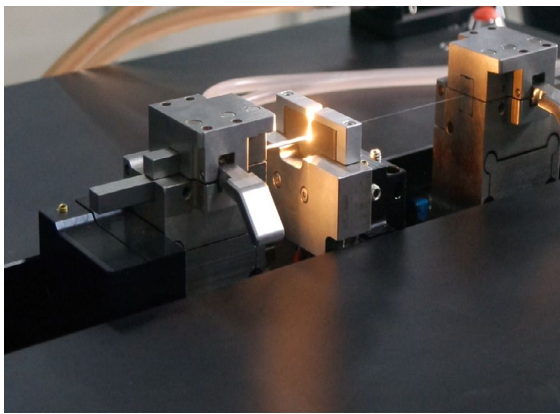

Stable thermal field of Filament

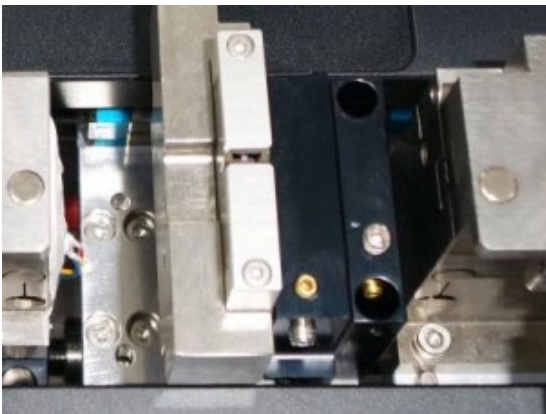

Adjustable Fire head assembly

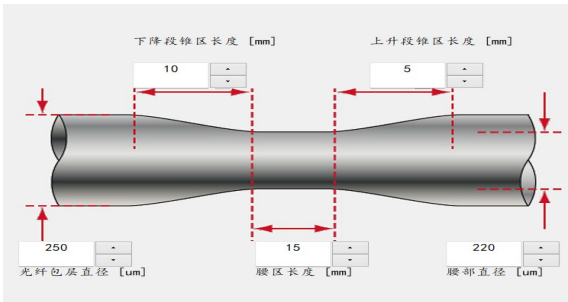

Friendly interface

Standard configuration list		
Name	Model	Quantity
Optical fiber taper	GWCLZ-20	1 (set)
Up insert	INSERT-U-500/750	1 (pce)
Up insert	INSERT-U-250/400	1 (pce)
Low insert	INSERT-LH-500	1 (pce)
Low insert	INSERT-LH-400	1 (pce)
Power cord	3*0.75 square	1 (pce)
Serial port cable	DB9PIN 1.5 meter	1 (pce)
Panel PC	IB00K-17	1 (pce)
Computer stand*Monitor base	CX0D complement RPRO-17(Y)	1 (pce)
Hard air tube (transparent PU)	3.2*1.8mm British system PU1/8	0.1 (meter)
Hard air tube (transparent PU)	φ8*6mm	4 (meter)
Direct-through tee T-type connector	PE-8	2 (pcs)
T-shaped variable diameter tee connector	PEG10-8	2 (pcs)
Water pipe connector	Φ4baota (Domestic) Female	2 (pcs)
Air tube connector	KQ2H23-04A (3.2 to 4) (SMC)/Domestic	1 (pce)
Variable diameter straight connector	PG10-8	2 (pcs)
Straight connector	PU-8	2 (pcs)
Certificate	QC	1 (pce)
Warranty card		1 (pce)
Instruction manual		1 (set)

Optional attachment		
Low insert	Up insert	Clamping range
INSERT-LH-250	INSERT-U-250/400(Flat surface)	180 - 320μm
INSERT-LH-400	INSERT-U-250/400(Flat surface)	280 - 510μm
	INSERT-U-400/400(Concave surface)	380 - 510μm
INSERT-LH-500	INSERT-U-400/400(Concave surface)	450 - 640μm
	INSERT-U-500/750 (500)	480 - 710μm
INSERT-LH-750	INSERT-U-500/750 (500)	640 - 870μm
	INSERT-U-500/750 (750)	730 - 960μm
Fire head assembly	V4/V6/T4	

Standard configuration diagram



GWCLZ-20



IB00K-17




Computer stand*Monitor base



Instruction manual



INSERT-U-400



INSERT-U-500



INSERT-LH-500



INSERT-LH-400



Direct-through tee T-type connector



T-shaped variable diameter tee connector



Straight connector



Variable diameter straight connector



Hard air tube $\phi 8*6\text{mm}$



Hard air tube 3.2*1.8mm
British system PU1/8



Water pipe connector



Air tube connector



Serial port cable



Power cord



Warranty card



Certificate