


# Optical Fiber Angled Cleaver GWCQG-10




## Specification

|                                 |                                                                                           |                   |
|---------------------------------|-------------------------------------------------------------------------------------------|-------------------|
| Model name                      |                                                                                           | GWCQG-10          |
| Optical fiber cladding diameter |                                                                                           | 80 ~ 1300μm       |
| Optical fiber coating diameter  |                                                                                           | 100 ~ 2000μm      |
| Cleaving angle                  |                                                                                           | 0-15°             |
| Cleaving length                 |                                                                                           | 3-72mm            |
| Blade life                      | Diamond blade, 20,000 times more (typical value, correspond 125μm optical fiber cleaving) |                   |
| Display screen                  |                                                                                           | 5inches color LCD |
| Power adapter                   | Input AC100/240V, Output DC13.5V/5.0A                                                     |                   |
| Battery parameter (XL-B)        | Voltage: 10.8V; Capacity: 6800mAH                                                         |                   |
| Dimensions                      | 240(L)*140(W)*160(H)mm                                                                    |                   |
| Operating condition             | Humidity 0~95%, Temperature 0~40°C(non dew)                                               |                   |
| Storage condition               | Humidity 0~95%, Temperature -40~80°C(non dew)                                             |                   |

## Effect display

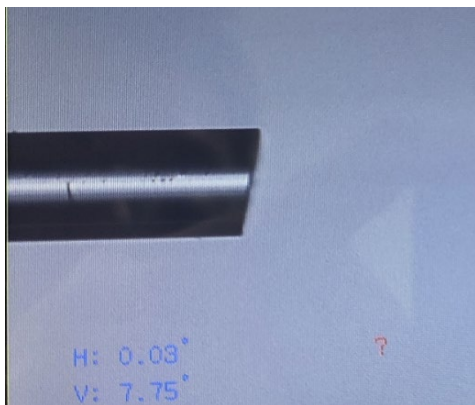

125μm optical fiber angle cleaving

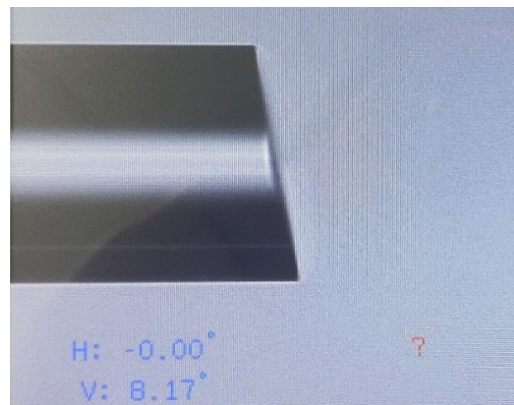

250μm optical fiber angle cleaving

| Standard configuration list  |                  |          |
|------------------------------|------------------|----------|
| Name                         | Model            | Quantity |
| Optical Fiber Angled Cleaver | GWCQG-10         | 1 (set)  |
| Up insert                    | INSERT-U-500/750 | 1 (pce)  |
| Up insert                    | INSERT-U-250/400 | 2 (pcs)  |
| Low insert                   | INSERT-LH-500    | 1 (pce)  |
| Low insert                   | INSERT-LH-400    | 1 (pce)  |
| Low insert                   | INSERT-LH-250    | 1 (pce)  |
| AC adapter                   | AA-135500-R      | 1 (set)  |
| Certificate                  |                  | 1 (pce)  |
| Warranty card                |                  | 1 (pce)  |
| Instruction manual           |                  | 1 (set)  |
| Spanner                      | L-Type(R-1.5mm)  | 1 (pce)  |

Standard configuration diagram



GWCQG-10



INSERT-U-400



INSERT-U-500



INSERT-LH-400



INSERT-LH-500



Instruction manual



AC adapter



L-Type spanner (R-1.5mm)



Certificate



Warranty card