



Portable Optical Fiber Cleaver GWCQG-13



Easy

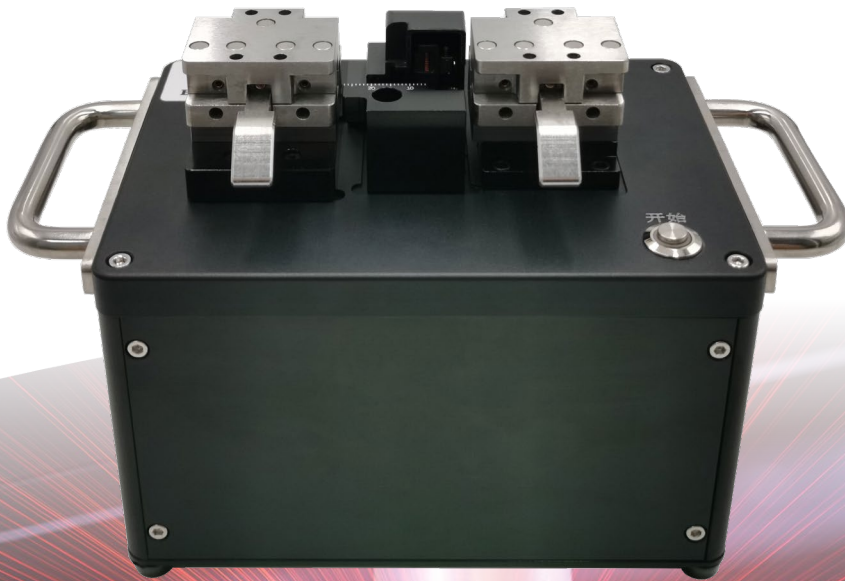

Stable



Efficient

Specification

Model name	GWCQG-13
Optical fiber cladding diameter	80μm-250μm
Optical fiber coating diameter	100μm-400μm
Cleaving length	3-60mm
Cleaving angle	0.5° (Typical value)
Blade life	Diamond blade, 10000times more
Battery capacity	3400 mAh (250μm optical fiber cleaving 2000times)
Power supply	Input: AC100/240V, Output: DC13.5V/5.0A
Dimensions	160 (L) *110 (W) *137 (H) mm
Operating condition	Humidity 0~95%, Temperature 0~40°C(non dew)
Storage condition	Humidity 0~95%, Temperature -40~80°C(non dew)

Standard configuration list

Name	Model	Quantity
Portable Optical Fiber Cleaver	GWCQG-13	1 (set)
Insert	INSERT-U-400/250	2 (pcs)
	INSERT-LC-400	1 (pce)
	INSERT-LC-250	1 (pce)
AC adapter	AA-135500-R	1 (set)
Certificate		1 (pce)
Warranty card		1 (pce)
Instruction manual		1 (set)
Spanner	L-Type (R-1.5mm)	1 (pce)



Standard configuration diagram



GWCQG-13



INSERT-U-400



INSERT-LC-400




INSERT-LC-250



1.5mm L-Type spanner



AA-135500-R



Warranty card



Certificate



Instruction manual