

Z31HD66X

SPECIFICATION



Specification

Z31HD66X

XPON ONU



Appearance: Choose your preferred color (supports custom colors)

1 OVERVIEW

- Z31HD66X series single-user ONU is designed for ONU in deferent FTTH solutions. The carrier-class FTTH application provides date service access.
- Z31HD66X series adopts high-performance and low-consumption chips, and supports CTC V2.0 interconnection and interworking standard of China Telecom. With the help of NGBN View NMS, it can provide subscribers with abundant services, and totally meet the needs of carrier-class FTTH devices.
- Z31HD66X series is designed by ZTE chipset.
- Small size, suitable for installation in various occasions

2 FUNCTIONAL FEATURE

- Router mode supports PPPoE / DHCP / static IP
- Support port-based rate limitation and bandwidth control
- In compliant with ITU-T G.984 Standard
- Up to 20KM transmission Distance
- Support data encryption, group broadcasting, port VLAN separation, etc.
- Support Dynamic Bandwidth Allocation (DBA)
- Support IPv4 & IPv6
- Support ONU auto-discovery/Link detection/re-mote upgrade of software
- Support VLAN division and user separation to avoid broadcast storm
- Support power-off alarm function, easy for link problem detection
- Support broadcasting storm resistance function
- Specialized design for system breakdown prevention to maintain stable system
- Support software online upgrading EMS network management based on SNMP, convenient for maintenance
- Support DC-Out with DC5525
- Support 802.3af for PD

HARDWARE SPECIFICATION

Item		Parameter
Interface	PON Interface	1 XPON optical interface Meet Class B+ standard Upstream 1.244Gbps, downstream 2.488Gbps SC-UPC single-mode fiber split ratio:1:128 Transmission distance 20KM
	RJ45 Line	1*10/100/1000M auto-negotiation Full/half duplex mode RJ45 connector 802.3af PD
	Power Interface	5~12V DC-IN for 5~12V Output 48V POE-IN for 12V Output(selectable)
	DC-Line	Don't put POE_in and DC_in together
Performance Parameters	PON Optical Parameter	Wavelength: Tx 1310nm, Rx1490nm Tx Optical Power:0.5~+5dBm Rx Sensitivity: -27dBm Saturation Optical Power: -8dBm Connector Type: SC-UPC Optical Fiber: 9/125μm single-mode fiber
	Data Transmission Parameter	Packet Loss Ratio:<1*10E-12 latency: <1.5ms
	Gateway	Router mode supports PPPoE / DHCP/ static IP WAN support Router and Bridge mode WAN support Internet LAN supports DHCP and static IP Support NAT and NAPT
	Business Capability	Layer 2 wire speed switching Support VLAN TAG/UNTAG, VLAN conversion Support Port-based speed limitation Support Priority classification Support storm control of broadcast
Network Management	Management Mode	Support ITU-T G.984 OMCI, ONU can be remotely managed by OLT Support Remote management through Telnet or http Local management
	Management Function	Status monitor, Configuration management, Alarm management, Log management
Indicator	LED Indicator	LOS: Optical Link Status PON: ONU Registered

Item		Parameter
Physical Features	Shell	Plastic casing
	Power	Power consumption: <2.3W
	Physical Specifications	Item Dimension: 105mm(L) x 28mm(W) x 18mm (H) Item weight: 0.04kg
	Environmental Specifications	Operating temperature: 0 to 55 °C Storage temperature: -20 to 70 °C Operating humidity: 10% to 90% (Non-condensing) Storage humidity: 10% to 90% (Non-condensing)

APPLICATION

- Typical Solution: FTTH、FTTB、PON+EOC
- Typical Business: INTERNET、IP Camera

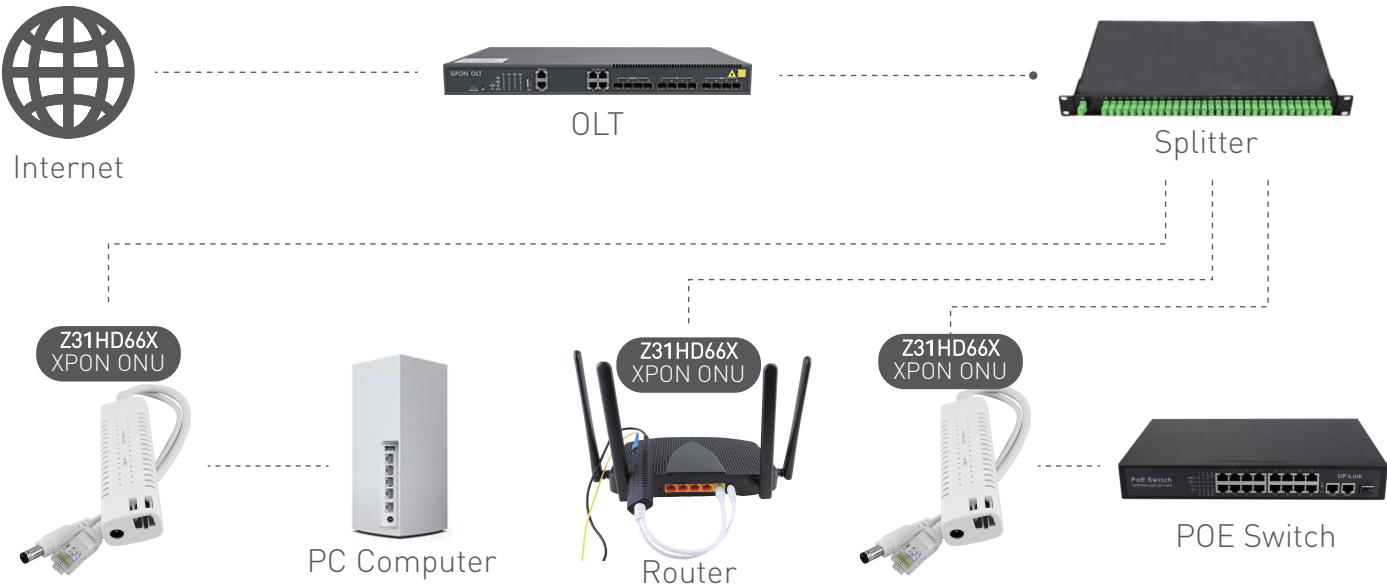


Figure: Z31HD66X Application Diagram

ORDERING INFORMATION

Product Name	Product Model	Descriptions
BOB Type XPON ONU	Z31HD66X	1*10/100M /1000M Ethernet interface, 1 XPON interface, plastic casing